
Grumpy Joe's Parquet Dance Floor Detailed Laying Instructions

Row 1:


Start at the top left hand corner position by placing the first panel with the 3 'end' lugs pointing to the left.

Then fit a second panel with the 3 end lugs pointing to the right

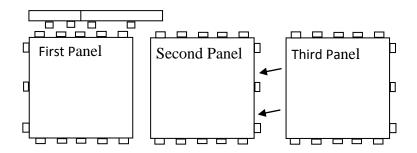

Continue to lay the row with as many full panels as required for the size of the floor, all with the 3 end lugs pointing right.


Make sure that the panels are flush along the length of the row to ensure the edging will be straight.




To fit panels:

Hold the panel at an angel as shown and push it so that the lugs slide underneath the panels already laid.

When the lugs are fully under, and the two panels are fully touching all along their edges, lower the panel to the floor

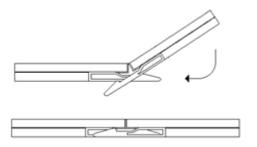

If the panels are not square, or if the edges are not touching along the full length, the panel being fitted will not lower. DO NOT FORCE PANELS DOWN – Simply adjust until it lowers.

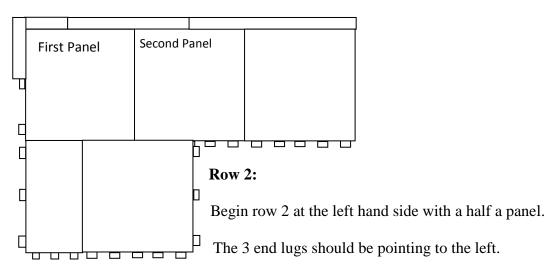

Then fit full panels with the 3 end lugs all pointing right, and complete the row with another half panel.


Edging:

Start to lay the edging when row one is completed. The edging then acts as a "straight edge" and ensures each row is square and flush as it is laid.

Fit the edging by pushing the lugs underneath the panels at an angle, and then lower to the floor, in the same manner as when laying panels. DO NOT force them down.

Half-length and full-length edges are supplied so that the panel joints and the edging joints never coincide, i.e. they follow the same overlapping brickwork pattern.

Corners are always positioned on the sides of the floor as shown below and never on the top.

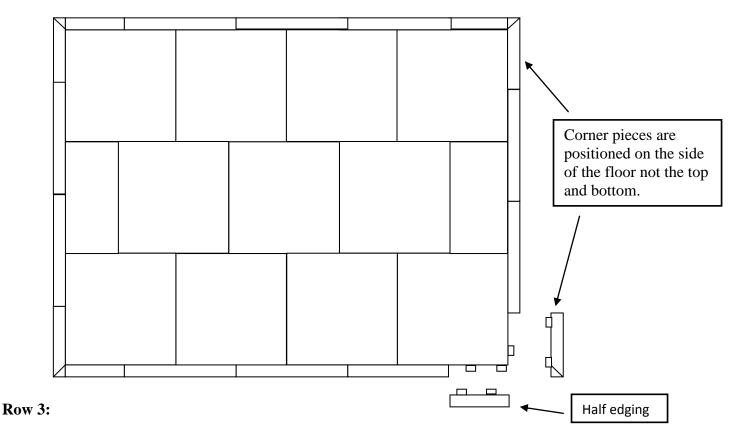

Lay as row one with full panels.

Row 4:

Lay as row two, start and finish with half panels.

Continue alternating rows and fitting edges as above until the floor is laid.

Grumpy Joe's

Redhill Marina, Ratcliffe on Soar Nottingham, England. NG11 0EB

Tel: 01509 670006 Email: sales@grumpyjoe.co.uk www.grumpyjoe.co.uk